


# JET TOWEL – HEATED


## TECHNICAL SPECIFICATION

|   |   |
|---|---|
| Colours Available   | White - Part no. JT-SB216JSH-W-CE<br>Black - Part no. JT-SB216JSH-H-CE<br>Silver - Part no. JT-SB216JSH-S-CE  |
| Casing Construction   | Polypropylene – ABS<br>Anti-microbial material  |
| Electrical  | Electrical supply: 220-240V AC, Single phase 50Hz<br>Rated Power: High Speed<br>Heater On – 1240W, Heater Off – 720W<br>Standard Speed<br>Heater On – 1070W, Heater Off – 550W<br>Standby: 1W<br>Motor Type: Brushless DC Motor |
| Operation   | Touch-free lower sensor activation, upper exit sensor<br>Hand dry time: 9-11 seconds<br>Operation switch off period: 30 seconds<br>Airflow rate: High - 106m/s, Standard – 98m/s<br>Volume: High - 61dB<br>Standard – 58dB      |
| Running Cost per day*<br>Energy used per day*<br>CO2 used per day*<br><i>(*based on 200 uses per day)</i> | £0.07<br>0.07kWh<br>0.3kg   |
| Filtration  | Lifetime anti-microbial filter  |
| IP Rating   | IPX4  |
| Unit Weight   | 11Kg  |
| Unit Dimensions (w/d/h mm)  | 300 x 219 x 670   |
| Drain Tank Capacity   | 0.8 Litres  |
| Safety Components   | Thermal fuse, over current breaker  |
| Standard Warranty   | 3 years parts and labour  |
| Recommended Installation Heights<br><i>(measured from floor bracket height)</i>                           | Male: 925 mm<br>Female: 905mm<br>Child/Disabled: 865-915mm  |


**FRONT ELEVATION**

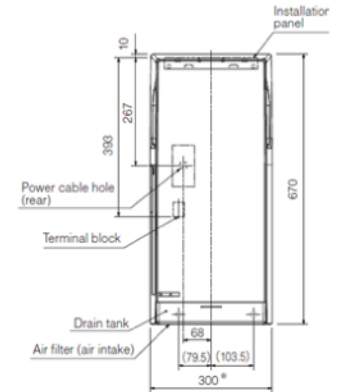

**SIDE ELEVATION**

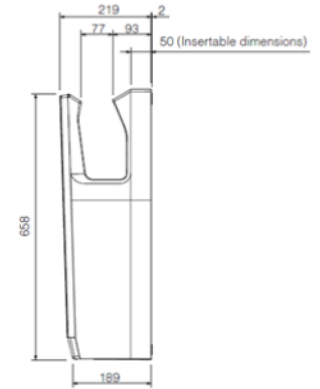

**TOP ELEVATION**

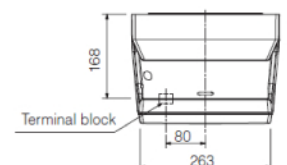

For further information contact :

www.o3solutions.com  
0800 458 7416  
mail@o3solutions.com

GreenSpec®



www.GreenSpec.com